



GP 672

6V 7.2Ah

GP 672 is a general purpose battery with 3-5 years in standby service or more than 260 cycles at 100% discharge in cycle service. As with all CSB batteries, all are rechargeable, highly efficient, leak proof and maintenance free.



Specification


Cells Per Unit	3
Voltage Per Unit	6
Capacity	7.2Ah @ 20hr-rate to 1.75V per cell @25 °C (77°F)
Weight	Approx. 1.31kg(2.90 lbs)
Maximum Discharge Current	100A/130A(5sec)
Internal Resistance	Approx. 20mΩ
Operating Temperature Range	Discharge: -20°C~50°C (-4°F~122°F) Charge: 0°C~40°C (32°F~104°F) Storage: -20°C~40°C (-4°F~104°F)
Nominal Operating Temperature Range	25°C±3°C (77°F±5°F)
Float Charging Voltage	6.75 to 6.9 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	2.16A
Equalization and Cycle Service	7.2 to 7.5 VDC/unit Average at 25°C (77°F)
Self Discharge	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Faston Tab 187/250
Container Material	-ABS (UL94-HB)*Flammability resistance of UL94-V2 can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 and UL1989. CSB is also certified by ISO 9001 and ISO 14001.

Dimensions

unit: (MM)

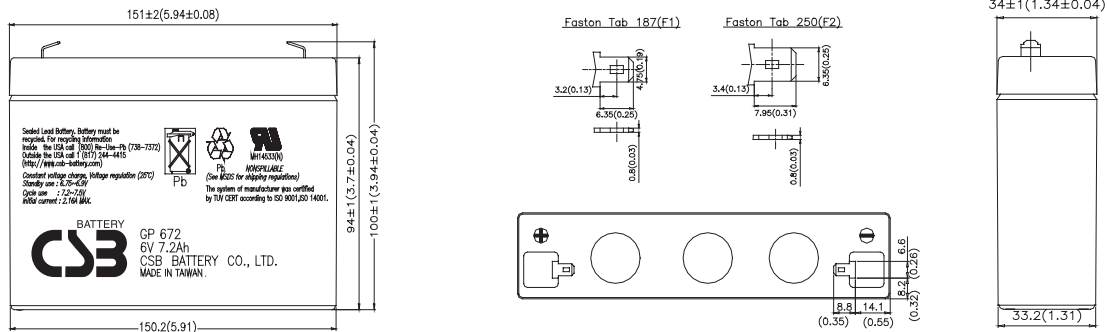

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	28.6	18.6	14.3	8.75	5.28	3.06	2.18	1.72	1.42	0.935	0.758	0.395
1.67V	26.8	17.9	14.0	8.69	5.27	3.05	2.17	1.71	1.41	0.932	0.752	0.385
1.70V	26.0	17.6	13.8	8.67	5.26	3.05	2.17	1.71	1.41	0.930	0.749	0.381
1.75V	24.3	16.8	13.3	8.55	5.24	3.04	2.16	1.71	1.41	0.927	0.739	0.370
1.80V	22.5	16.0	12.8	8.42	5.22	3.03	2.15	1.70	1.40	0.924	0.729	0.359
1.85V	20.8	15.2	12.3	8.30	5.20	3.02	2.14	1.70	1.40	0.921	0.719	0.348

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	172	112	85.5	52.5	31.7	18.4	13.1	10.3	8.52	5.62	4.55	2.37
1.67V	161	108	83.4	52.2	31.6	18.3	13.0	10.2	8.47	5.59	4.52	2.31
1.70V	156	106	82.5	52.0	31.6	18.3	13.0	10.2	8.45	5.58	4.50	2.29
1.75V	146	101	79.8	51.3	31.5	18.3	13.0	10.2	8.45	5.58	4.44	2.23
1.80V	135	96.0	77.0	50.5	31.3	18.2	12.9	10.1	8.44	5.57	4.38	2.16
1.85V	125	91.0	74.3	49.8	31.2	18.2	12.9	10.1	8.44	5.57	4.32	2.10

● All mentioned values are average values.


Trickle (or Float) Service Life

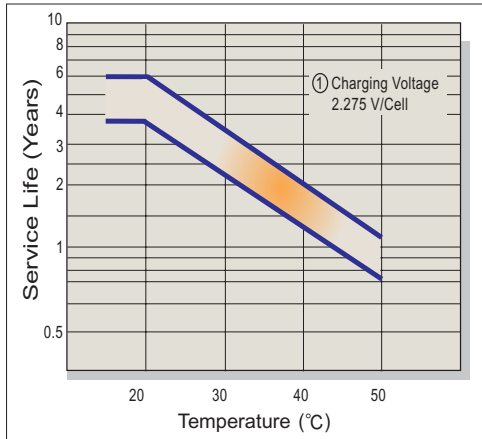


Capacity Retention Characteristic

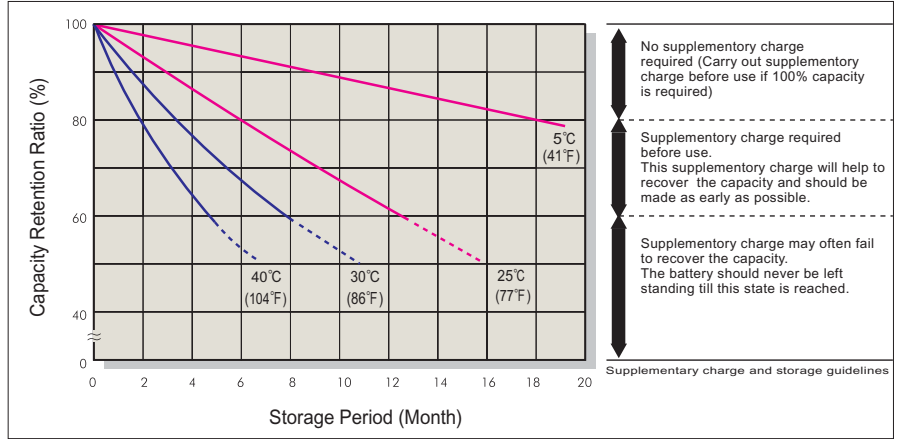


Battery Voltage and Charge Time for Standby Use

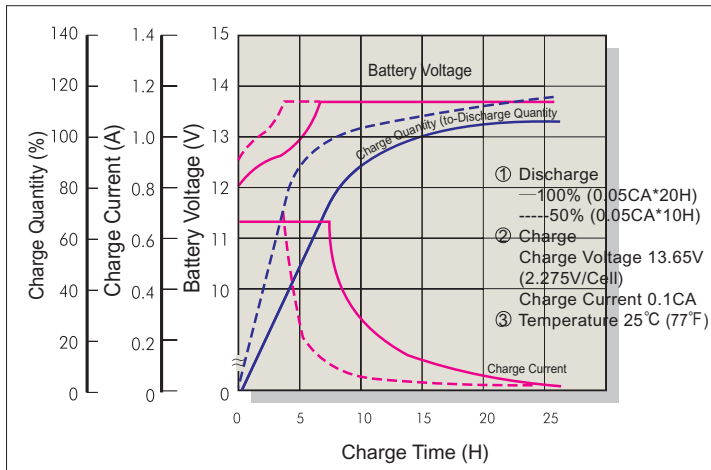


Cycle Service Life

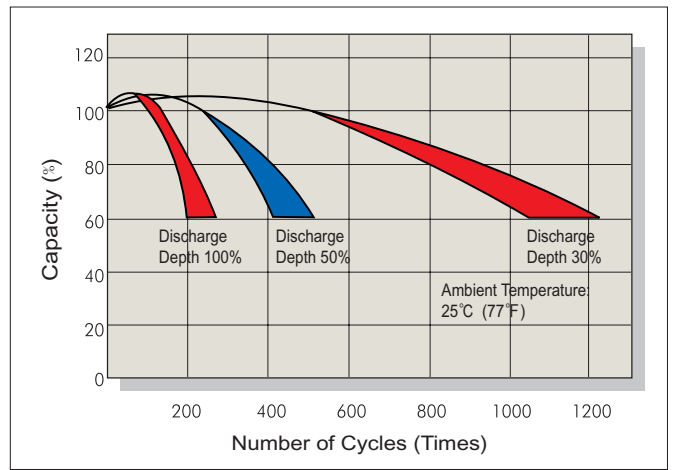

Battery Voltage and Charge Time for Cycle Use

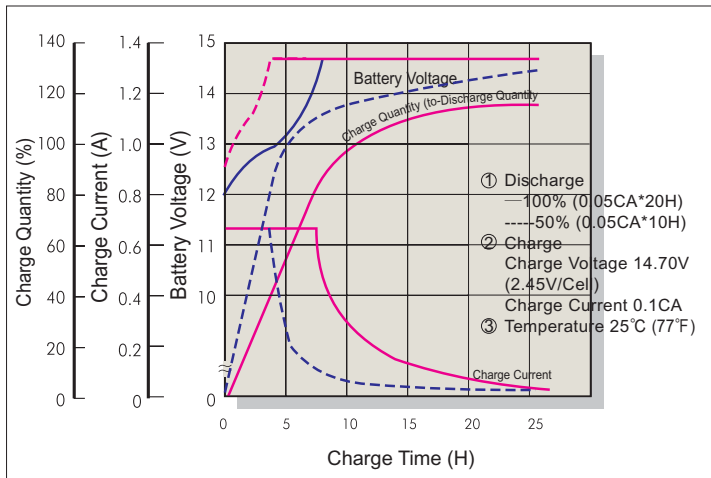

Terminal Voltage (V) and Discharge Time (25°C 77°F)

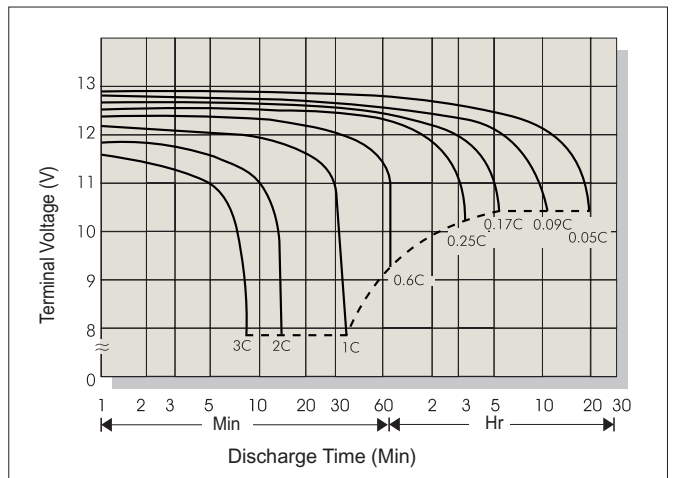

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40-2.50	0.3C
Standby	25°C (77°F)	2.275	2.25-2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C