

HR 1214W F2

12V 14W

HR 1214W F2 is specially designed for high efficient discharge application. Its characteristics are small volume, light weight and high discharge efficiency. It can be used for more than 260 cycles at 100% discharge in cycle service, or three to five years in standby service.




Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	14W @ 15minute-rate to 1.67V per cell @25 °C (77°F)
Weight	Approx. 1.40kg(3.08 lbs)
Maximum Discharge Current	60A(5sec)
Internal Resistance	Approx. 30mΩ
Operating Temperature Range	Discharge: -20°C~50°C (-4°F~122°F) Charge: 0°C~40°C (32°F~104°F) Storage: -20°C~40°C (-4°F~104°F)
Nominal Operating Temperature Range	25°C±3°C (77°F±5°F)
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	1.4A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
Self Discharge	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Faston Tab 250
Container Material	-ABS (UL94-HB)*Flammability resistance of UL94-V2 can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 as well as ISO 9001 and ISO 14001 certified.

Dimensions

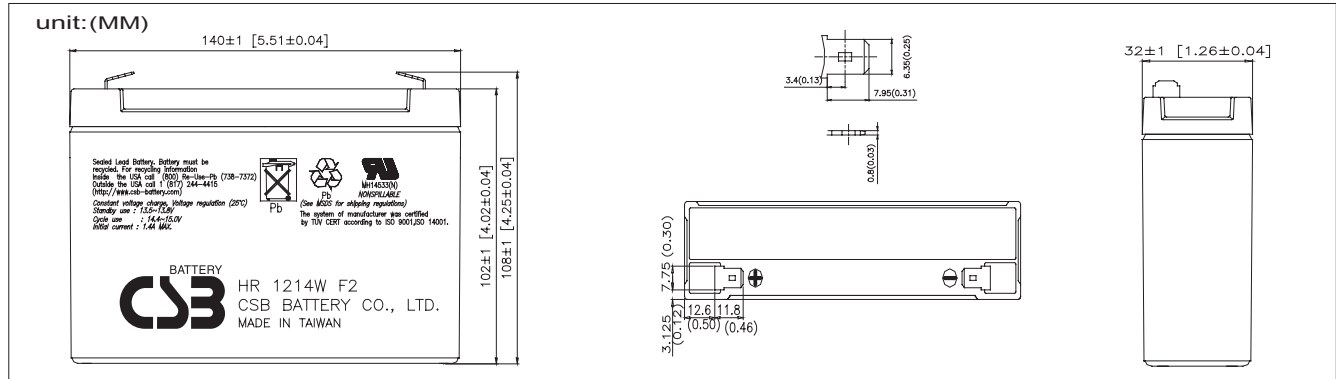

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	22.3	16.8	13.3	11.2	9.50	8.00	6.88	4.48	2.16	1.62
1.67V	21.6	16.2	13.0	11.0	9.38	7.66	6.45	4.36	2.14	1.54
1.70V	21.3	15.9	12.8	10.9	9.33	7.52	6.26	4.31	2.13	1.50
1.75V	20.3	15.3	12.4	10.5	9.02	7.31	6.10	4.14	2.08	1.50
1.80V	19.2	14.8	12.0	10.2	8.71	7.10	5.93	3.97	2.03	1.49
1.85V	18.1	14.2	11.6	9.80	8.40	6.89	5.77	3.80	1.98	1.49

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	267	201	160	134	114	96.0	82.5	53.7	25.9	19.4
1.67V	259	194	156	132	113	91.9	77.3	52.3	25.7	18.4
1.70V	256	191	154	131	112	90.2	75.1	51.7	25.6	18.0
1.75V	243	184	149	127	109	87.7	73.2	49.7	25.0	18.0
1.80V	230	177	144	122	105	85.2	71.2	47.6	24.4	17.9
1.85V	217	170	139	118	102	82.7	69.3	45.6	23.8	17.9

- All mentioned values are average values.
- Low rate discharge mode (over 90 mins.) is not recommended.


Trickle (or Float) Service Life

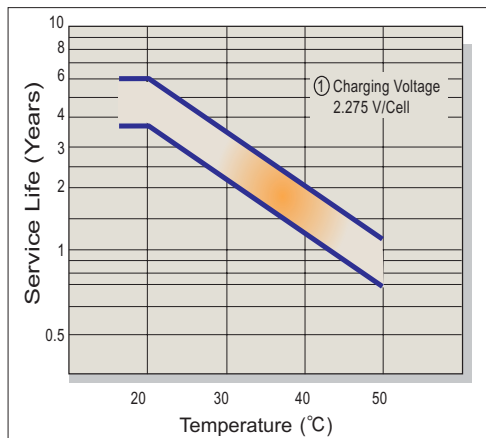


Capacity Retention Characteristic

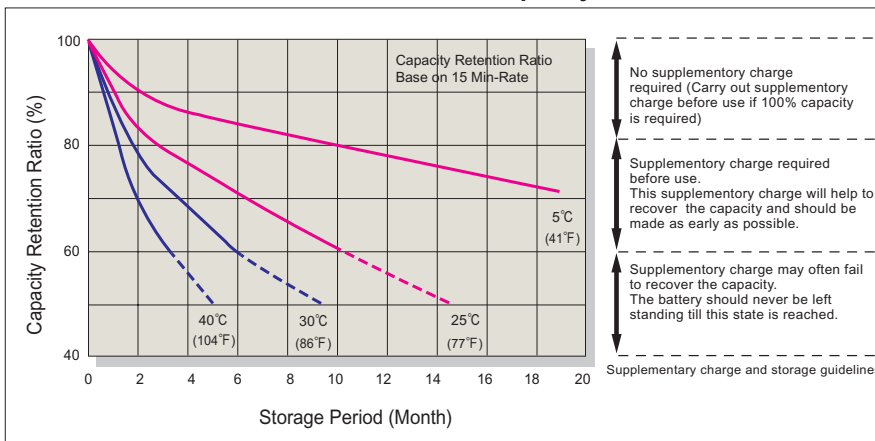


Battery Voltage and Charge Time for Standby Use

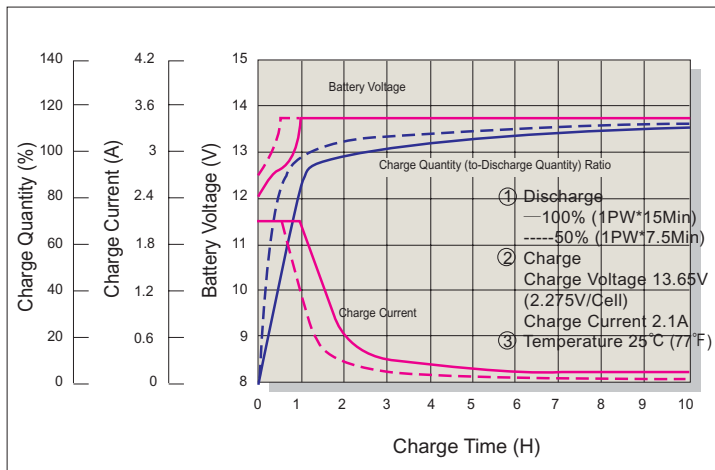


Cycle Service Life

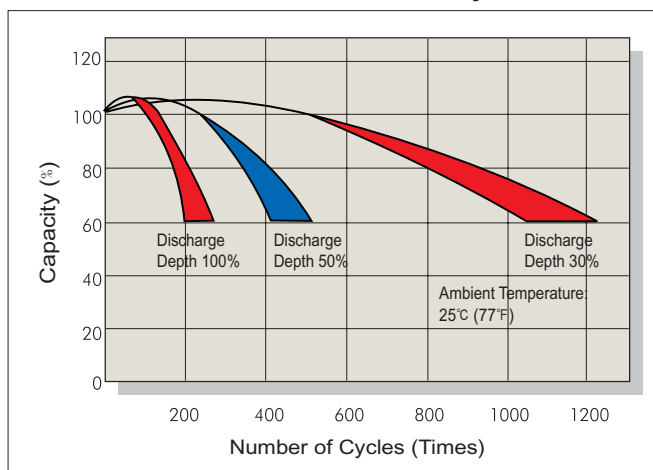

Battery Voltage and Charge Time for Cycle Use

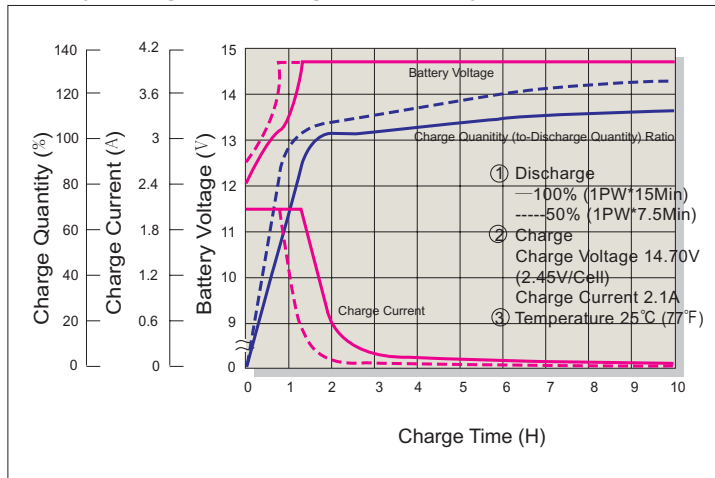

Terminal Voltage (V) and Discharge Time (25°C 77°F)

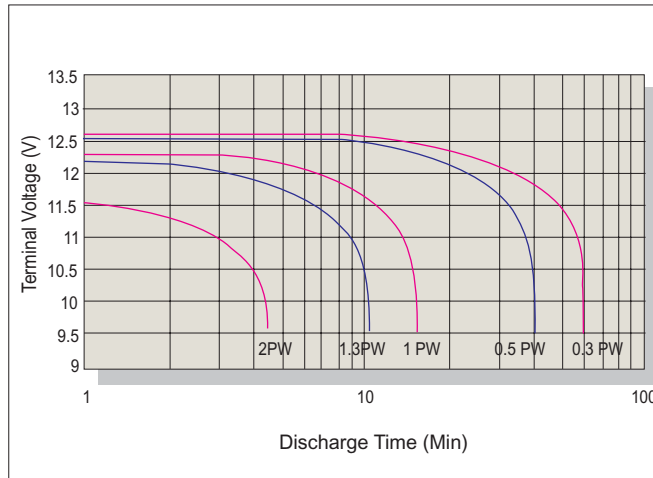

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.3C
Standby	25°C (77°F)	2.275	2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C